

## Vapor Tight Fixture

# VFS Tri-proof Fixture

IP65

IK09

130lm/w



The VFS LED tri-proof light has a rectangular design and offers both optimum lighting and sealing results, thanks to its water, dust and corrosion resistant materials which give it IP65 protection. It has an aluminum housing and a PC cover and is ideal for replacing conventional fluorescent tubes. A massive internal aluminum core provides stability and assures good thermal conditions for SMD LED chips as well as the internal isolated power driver. This modern and efficient tri-proof light is available in several wattages starting from 27W up to 56W. It could be fitted with the microwave motion sensor and fitted with the emergency battery backup to meet different requirements. The design and features of this tri-proof light make it perfect for installing in a wide range of facilities such as factories, warehouses, car parks, tunnels, terraces, etc., as well as in humid areas.



## Product Details



PC materials with a longer lifespan, more than 10 years.



High efficient LED chips with 130lm/W light efficiency, and aluminum plate with high-thermal conductivity.



Rotary fixed buckles, and safety ropes for convenient installation.

## Features:


CE/RoHS listed for wet locations / IP65 rated / 130 lumens per watt / 200-260V universal voltage / Microwave Motion Sensor optional / 3 hours Emergency Battery Backup optional

## Specifications:

VFS Tri-proof fixture :VFSD4F-XXX X X XX (Remark: The first and second and third letter "X" denote the color temperature(CCT) of LED.(e.g. 40K=4000K), the forth X can be F or C , "F"=Forst Cover , "C"=clearly cover; Suffix letter "P" denote dimmable, Suffix letter "S" denote NON-Dimmable, the sixth and the seventh X can be SR denote mothion sensor inside EM emergency kit inside , RM bulit in sensor and emergency)

Article Number	Size	Power	Lumens	Beam Angle	CRI	Voltage	Color	Lens	emergency	sensor	Dimming
120~130lm/w with frosted striped cover, 130~140lm/w with striped clearly and light Frost cover											
VFSD4F-40KFXXXX	1265*112*72mm	40W	4900lm	120°	>80	100~277VAC	4900-5300K	clearly	option	option	Option(0-10V)
VFSD4F-50KFXXXX	1265*112*72mm	40W	4900lm	120°	>80	100~277VAC	3800-4200K	light	option	option	Option(0-10V)
VFSD4F-40KCXXXX	1265*112*72mm	40W	5500lm	120°	>80	100~277VAC	4900-5300K	light	option	option	Option(0-10V)
VFSD4F-50KCXXX	1265*112*72mm	40W	5500lm	120°	>80	100~277VAC	3800-4200K	Frost	option	option	Option(0-10V)
VFSD4F-40KLXXX	1265*112*72mm	40W	5200lm	120°	>80	100~277VAC	3800-4200K	Frost	option	option	Option(0-10V)
VFSD4F-50KLXXX	1265*112*72mm	40W	5200lm	120°	>80	100~277VAC	4900-5300K	Frost	option	option	Option(0-10V)
VFSD5F-40KFXXX	1565*112*72mm	56W	6400lm	120°	>80	100~277VAC	3800-4200K	clearly	option	option	Option(0-10V)
VFSD5F-40KFXXX	1565*112*72mm	56W	6400lm	120°	>80	100~277VAC	3800-4200K	clearly	option	option	Option(0-10V)
VFSD5F-50KFXXX	1565*112*72mm	56W	6400lm	120°	>80	100~277VAC	4900-5300K	clearly	option	option	Option(0-10V)
VFSD5F-40KCXXX	1565*112*72mm	56W	6500lm	120°	>80	100~277VAC	3800-4200K	light	option	option	Option(0-10V)
VFSD5F-40KCXXX	1565*112*72mm	56W	6500lm	120°	>80	100~277VAC	3800-4200K	light	option	option	Option(0-10V)
VFSD5F-50KCXXX	1565*112*72mm	56W	6500lm	120°	>80	100~277VAC	4900-5300K	light	option	option	Option(0-10V)
VFSD5F-40KLXXX	1565*112*72mm	56W	7200lm	120°	>80	100~277VAC	3800-4200K	Frost	option	option	Option(0-10V)
VFSD5F-40KLXXX	1565*112*72mm	56W	7200lm	120°	>80	100~277VAC	3800-4200K	Frost	option	option	Option(0-10V)
VFSD5F-50KLXXX	1565*112*72mm	56W	7200lm	120°	>80	100~277VAC	4900-5300K	Frost	option	option	Option(0-10V)
VFSS5F-40KFXXX	1565*80*72mm	27W	3200lm	120°	>80	100~277VAC	3800-4200K	clearly	option	option	Option(0-10V)
VFSS5F-50KFXXX	1565*80*72mm	27W	3200lm	120°	>80	100~277VAC	3800-4200K	clearly	option	option	Option(0-10V)
VFSS5F-40KCXXX	1565*80*72mm	27W	3400lm	120°	>80	100~277VAC	4900-5300K	clearly	option	option	Option(0-10V)
VFSS5F-50KCXXX	1565*80*72mm	27W	3400lm	120°	>80	100~277VAC	3800-4200K	light	option	option	Option(0-10V)
VFSS5F-40KLXXX	1565*80*72mm	27W	3700lm	120°	>80	100~277VAC	3800-4200K	light	option	option	Option(0-10V)
VFSS5F-50KLXXX	1565*80*72mm	27W	3700lm	120°	>80	100~277VAC	4900-5300K	light	option	option	Option(0-10V)

**Dimension: (mm/in)**

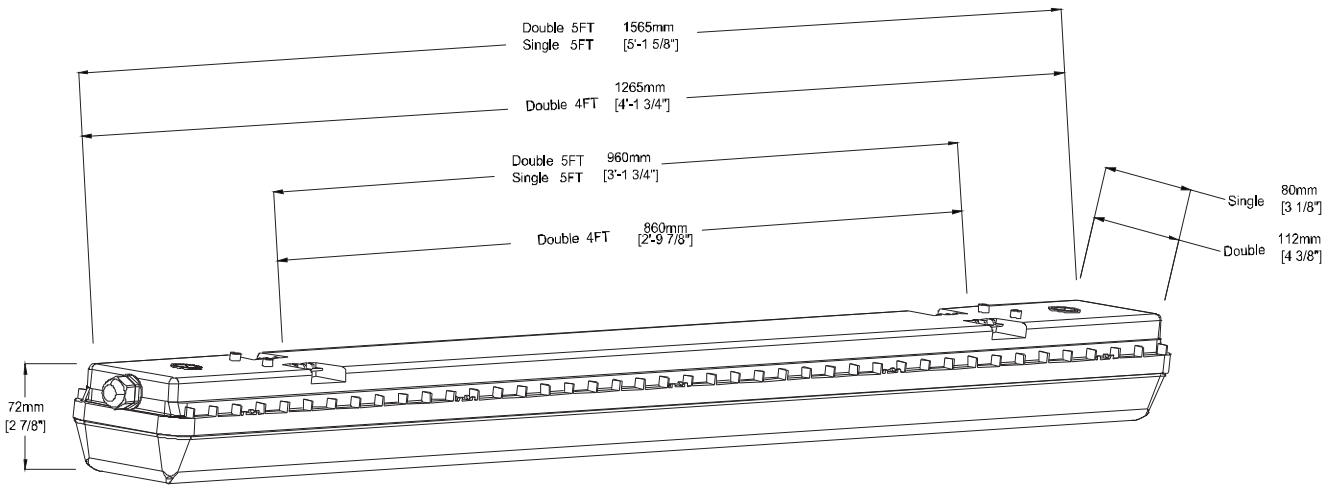

**Photometric:**

