

## Wall Pack Light

# WPFC Full Cutoff Wall Pack

IP65

125lm/w



The WPFC LED wall pack consumes 60/100/150 watts and replaces 175 watts to 400 watts metal halide wall packs. Construction consists of die-cast aluminum housing with a tempered glass refractor, the LED wall pack operates within a wide range input voltage 100-277VAC/347-480VAC, comes in 5000K cool white color temperature. The Full Cutoff LED wall pack eliminates light pollution and directs the light downward. Also this LED wall pack is 0-10V dimmable and can be installed with photocell sensor. LED wall packs are more energy efficient and can lower maintenance costs in the long run. Install LED wall packs for building lighting and perimeter lighting for outdoor commercial applications, such as parking lot lighting, entryway lighting, security lighting, and more.



## Product Details



High quality power supply,  
up to 50000hrs lifespans.



Internal heatsink design, for good heat  
dissipation and be elegant.



Lightly frosted glass, to reduce glare without  
reducing light efficiency.


## Features:

ETL/cETL listed for wet and outdoor locations / 130lumens per watt / 100-277V or 347-480V input voltage / 0-10V dimming standard, 10-100% / Photocell included for dusk-to-dawn operation / Full Cutoff structure directs the light downward

**Specifications:**

| ITEM                | SPECIFICATION         | KLWPFC060-XXXXFX                                    | KLWPFC100-XXXXFX                                    | KLHVWPFC150-XXXXFX                                  |
|---------------------|-----------------------|---|---|---|
| GENERAL PERFORMANCE | Wattage(W)            | 60W   | 100W  | 150W  |
|                     | Lumens Delivered (lm) | 7500lm  | 12500lm   | 18700lm   |
|                     | Efficacy (lm/W)       | 125lm/w   | 125lm/w   | 125lm/w   |
|                     | CRI                   | >70   | >70   | >70   |
|                     | Color Temperature     | 3000K/4000K/5000K                                   | 3000K/4000K/5000K                                   | 3000K/4000K/5000K                                   |
|                     | L70                   | More than 50000hours                                | More than 50000hours                                | More than 50000hours                                |
|                     | Power Factor          | 0.98at 100VAC 0.90 at 277VAC                        | 0.98at 100VAC 0.90 at 277VAC                        | 0.98at 100VAC 0.90 at 277VAC                        |
| ELECTRICAL          | Input Voltage         | 100-277VAC  | 100-277VAC  | 250-480VAC  |
|                     | Housing               | Die-cast aluminum body (Bronze/Black). Glass diffus | Die-cast aluminum body (Bronze/Black). Glass diffus | Die-cast aluminum body (Bronze/Black). Glass diffus |
|                     | Installation          | Recessed outlet box or wall surface                 | Recessed outlet box or wall surface                 | Recessed outlet box or wall surface                 |
| PHYSICAL            | Operating temperature | -30 C Up to 50 C (-22 F up to 122 F)                | -30 C Up to 50 C (-22 F up to 122 F)                | -30 C Up to 50 C (-22 F up to 122 F)                |
|                     | Environment           | damp/wet locations                                  | damp/wet locations                                  | damp/wet locations                                  |
| CERTIFICATION       | Warranty              | 5 years   | 5 years   | 5 years   |
|                     | Certification         | ETL/cETL  | ETL/cETL  | ETL/cETL  |

**Dimension: (mm/in)**

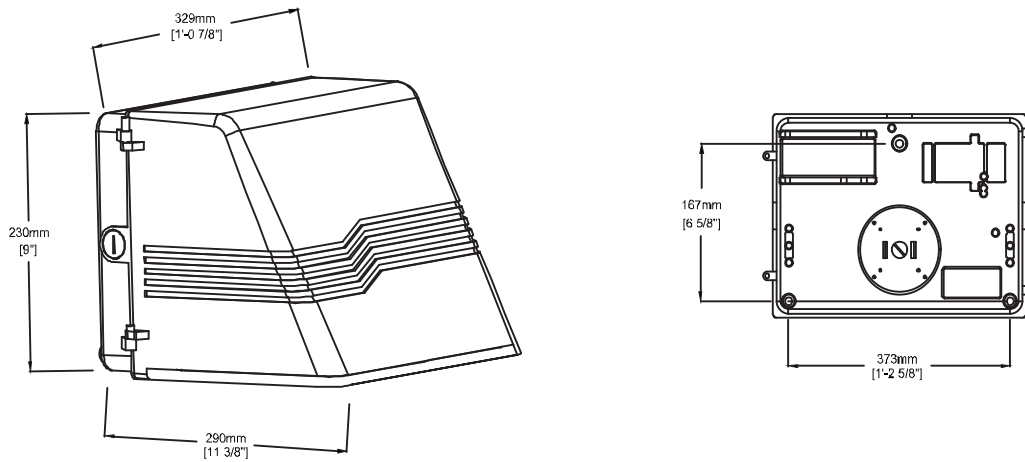

**Photometric:**

