


Recessed Panel Light




Features:

- Material: Powder Coating Iron+PC Cover
- Power & CCT Selectable option
- 100-277V and 0-10V dimming
- Recessed & Easy Installation: drop this Ultra-light panel right on the lay-in t-bar ceiling, easily recess the panel while replace fixtures or for new construction project.
- ETL Approved
- Anti-Glare style available

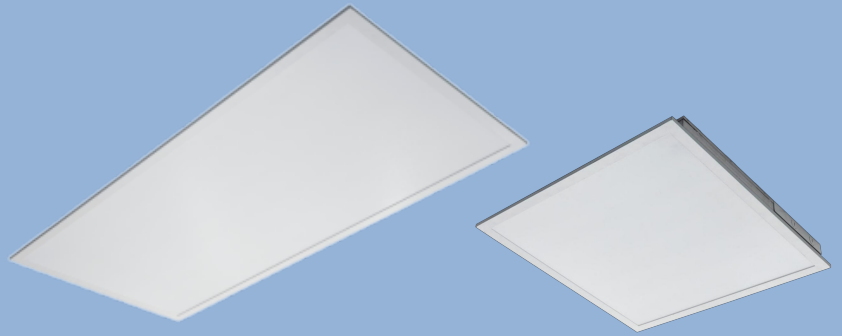


0-10V Dimmability


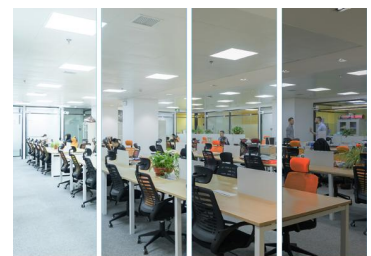


PN22

Dimensions

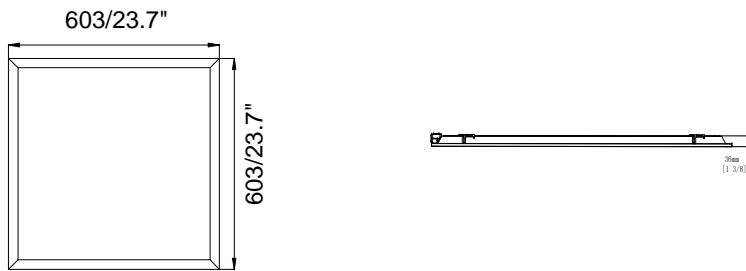

Light Distribution

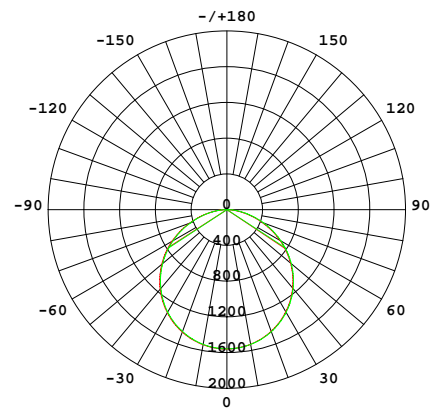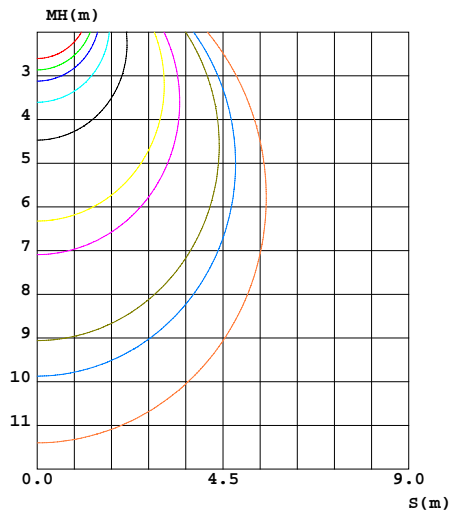


Specifications:


Model	PN22-XXX-3CT	PN22-40-3CT
Power	25/30/40W Selectable	25/30/40W Selectable
CCT	Single CCT	3500/4000/5000K selectable
Brightness	4000~4400lm	
Dimension	23.7"x23.7"x 1 3/8"	
Voltage	AC 100-277V	
Power Efficiency	0.9	
RA	80	
LED Type	SMD2835	
Dimmable	Yes, 0-10V	

PN24

Dimensions

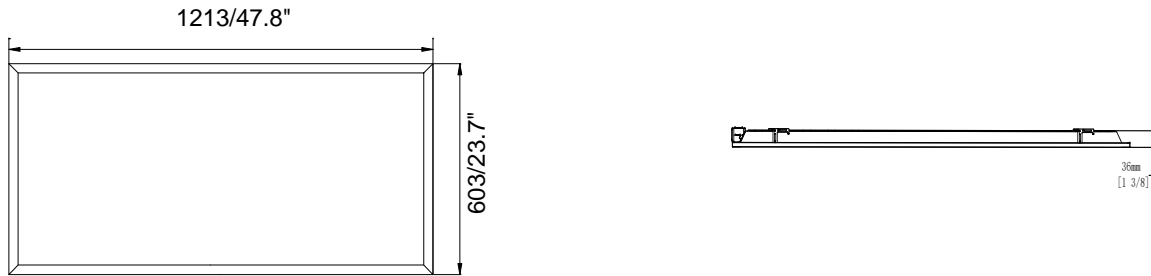

Light Distribution

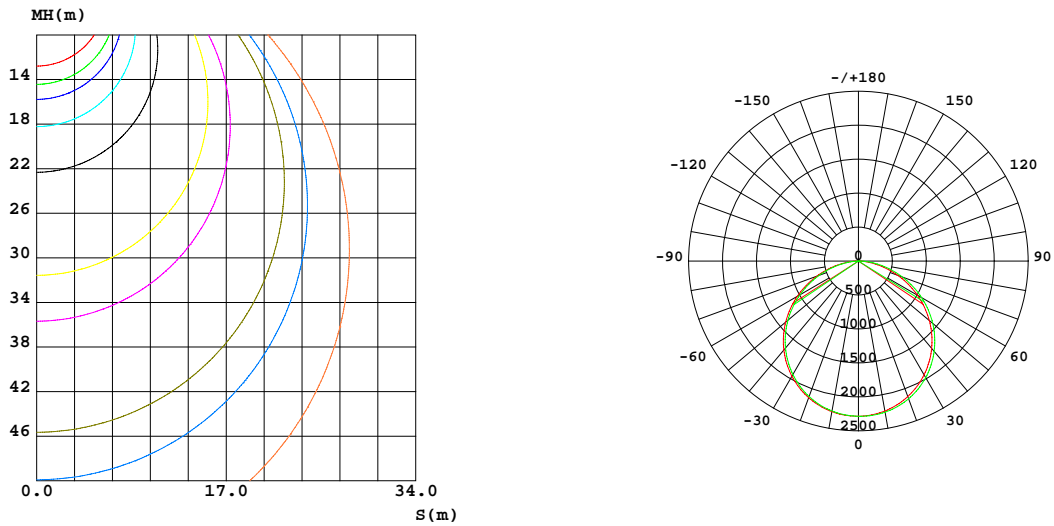

Specifications:

Model	PN24-XXK-XXX	PN24-50-3CT
Power	30/40/50W Selectable	30/40/50W Selectable
CCT	Single CCT	3 CCT Selectable
Brightness	5000-5500lm	
Dimension	47.8"x23.7"x 1 3/8"	
Voltage	AC 100-277V	
Power Efficiency	0.9	
RA	80	
LED Type	SMD2835	
Dimmable	Yes, 0-10V dimming	