



Surface Panel Light

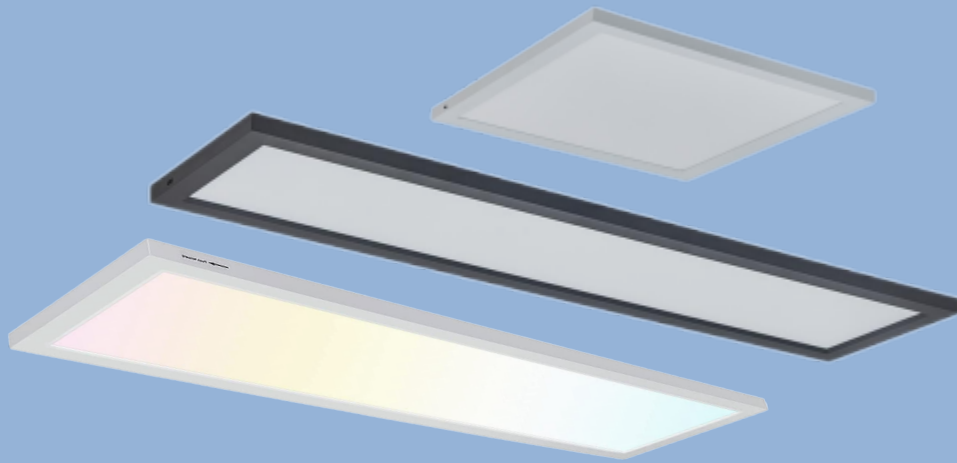

Features:

- Aluminum frame
- Nightlight option;
- CCT Selectable;
- Different trim white, silver, ORB & brush nickel color available
- High Brightness with efficient LEDs and driver.
- ETL Approved.
- Smooth, Uniform Dimmable : 10%-100% dimming range, compatible with most household triac LED dimmers for smooth and flicker-free operation.

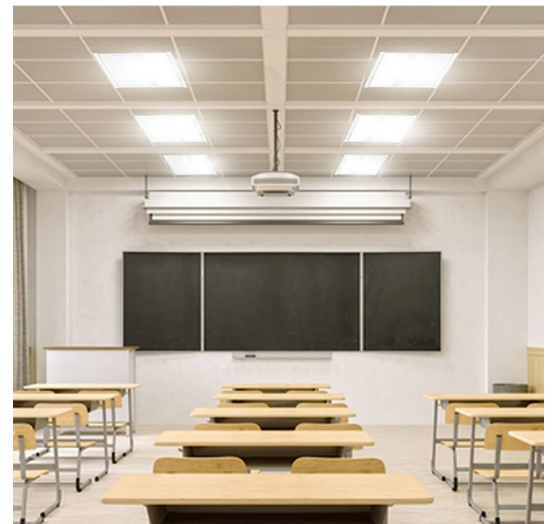

IPN-1040






LED PANEL LIGHT

PRODUCT SPECIFICATIONS

FEATURES LED PANEL LIGHT

Part Number	IPN-1040-3CT	IPN-1040-6CT
Kelvin Temp (CCT)	3000/4000/5000K	3000/4000/5000K+2000K
Product Dimensions	45-7/8"L x 11-7/8"W x 1"	45-7/8"L x 11-7/8"W x 1-3/8"H
Wattage	48W	48W+5W
Shade/Glass Type	Aluminum	
Extension	N/A	
Bulb Type	LED	
Bulb Included	Yes	
LED Type	SMD 4014	
CRI	80	
Lumens	4800lm	
Efficacy	100lm/W	
Finish	White/ORB/Silver/Brush Nickel	
Equivalent Wattage	Incandescent-400W	
Voltage	120VAC, triac dimming	
Average hour life	50,000 hrs	
Min/Max Ambient Temp	-20°C~50°C	
Product Material	Aluminum+PS	
Location Listing	Damp	
Certifications	ETL	

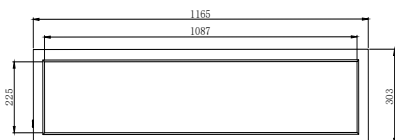

Normal mode



Night light mode

IPN-1040




- LED Panel Light
- 5 Year Warranty
- Uses Integrated 48W LED
- Suitable for Damp Location



IPN-2020-3CT



LED PANEL LIGHT

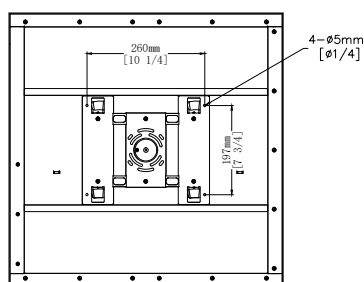

PRODUCT SPECIFICATIONS

FEATURES	LED PANEL LIGHT
Part Number	IPN-2020-3CT
Finish	White
Shade/Glass Type	Aluminum
Kelvin Temp (CCT)	3000/4000/5000K
Product Dimensions	23-7/8"L x 23-7/8"W x 1"H
Extension	N/A
Bulb Type	LED
Bulb Included	Yes
LED Type	SMD 2835
CRI	80
Lumens	4800lm
Efficacy	100lm/W
Wattage	48W
Equivalent Wattage	Incandescent-400W
Voltage	120V, Triac dimming
Average hour life	50,000 hrs
Min/Max Ambient Temp	-20°C~50°C
Product Material	Aluminum+PS
Location Listing	Damp

IPN-2020-3CT



- LED Panel Light
- 5 Year Warranty
- Uses Integrated 48W LED
- Suitable for Damp Location

IPN-1020-3CT



LED PANEL LIGHT

PRODUCT SPECIFICATIONS



Normal mode



Night light mode

FEATURES	LED PANEL LIGHT	
Part Number	IPN-1020-3CT	IPN-1020-6CT
Kelvin Temp (CCT)	3000/4000/5000K	3000/4000/5000K+2000K
Product Dimensions	23-7/8"L x 11-7/8"W x 1"	23-7/8"L x 11-7/8"W x 1-3/8"H
Wattage	24W	24W+4W
Shade/Glass Type	Aluminum	
Extension	N/A	
Bulb Type	LED	
Bulb Included	Yes	
LED Type	SMD 4014	
CRI	80	
Lumens	2400lm	
Efficacy	100lm/W	
Finish	White/ORB/Silver/Brush Nickel	
Equivalent Wattage	Incandescent-200W	
Voltage	120VAC, triac dimming	
Average hour life	50,000 hrs	
Min/Max Ambient Temp	-20°C~50°C	
Product Material	Aluminum+PS	
Location Listing	Damp	
Certifications	ETL	

IPN-1020

- LED Panel Light
- 5 Year Warranty
- Uses Integrated 24W LED
- Suitable for Damp Location





IPN-1010-3CT



LED PANEL LIGHT

PRODUCT SPECIFICATIONS

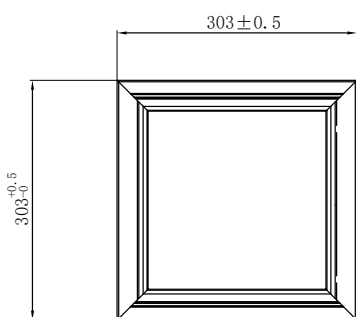

FEATURES	LED PANEL LIGHT
Part Number	IPN-1010-3CT
Finish	White
Shade/Glass Type	Aluminum
Kelvin Temp (CCT)	3000/4000/5000K
Product Dimensions	23-7/8"L x 23-7/8"W x 1"H
Extension	N/A
Bulb Type	LED
Bulb Included	Yes
LED Type	SMD 2835
CRI	80
Lumens	1000lm
Efficacy	100lm/W
Wattage	10W
Equivalent Wattage	Incandescent-100W
Voltage	120V, Triac dimming
Average hour life	50,000 hrs
Min/Max Ambient Temp	-20°C~50°C
Product Material	Aluminum+PS
Location Listing	Damp

IPN-1010-3CT

- LED Panel Light
- 5 Year Warranty
- Uses Integrated 10W LED
- Suitable for Damp Location