



Canopy Light



CPSM100 Square




CPSL100 Round

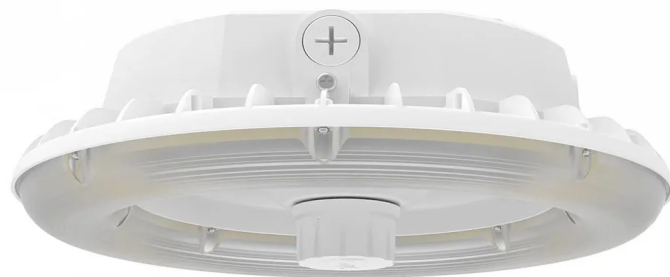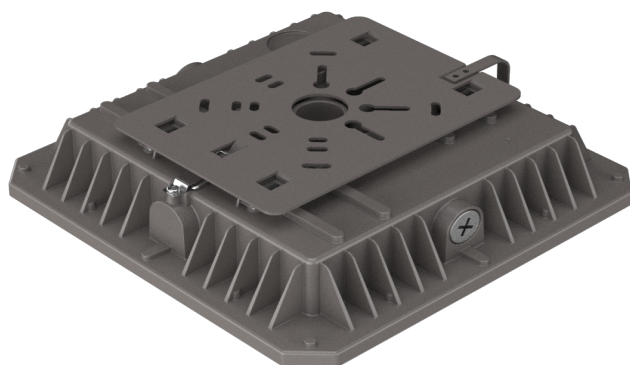


Canopy Light

Features:



- ETL/cETL listed for wet locations, IP65 rated.
- 150° Beam Angle.
- Plug in motion sensor and EM battery backup optional.
- Power & CCT Selectable.
- 120-277V universal voltage, 120-347V available.
- 0-10V dimming standard.
- Low-profile appearance with shock proof polycarbonate lens.

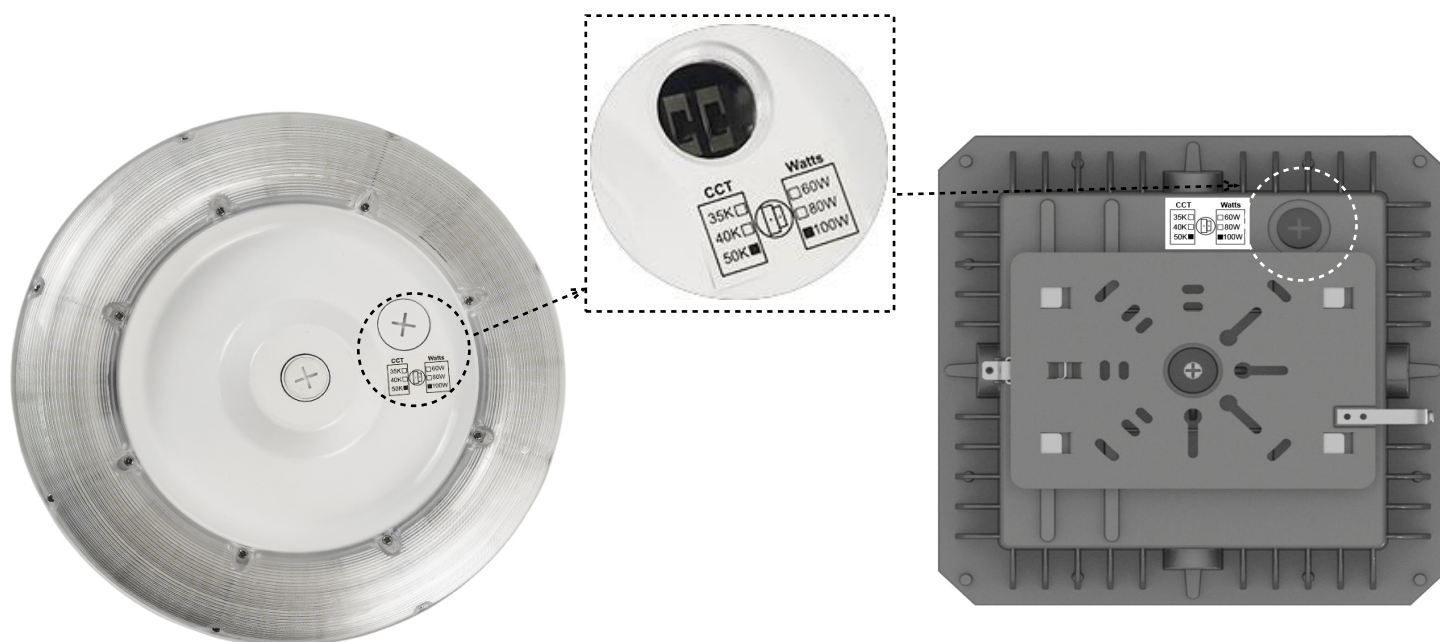

Product Specification

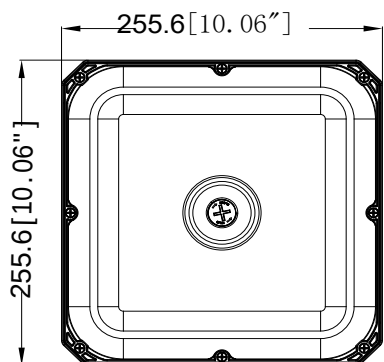


CPSM100 Square

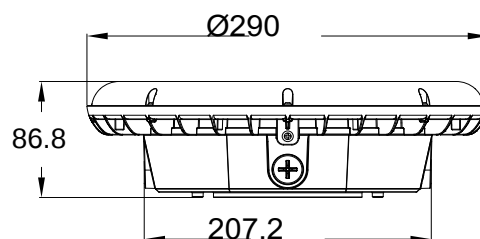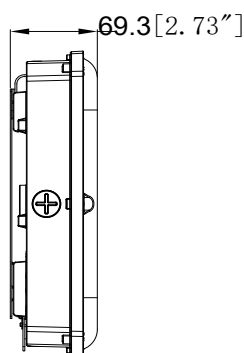


CPSL100 Round

Canopy Light

Polar Graph

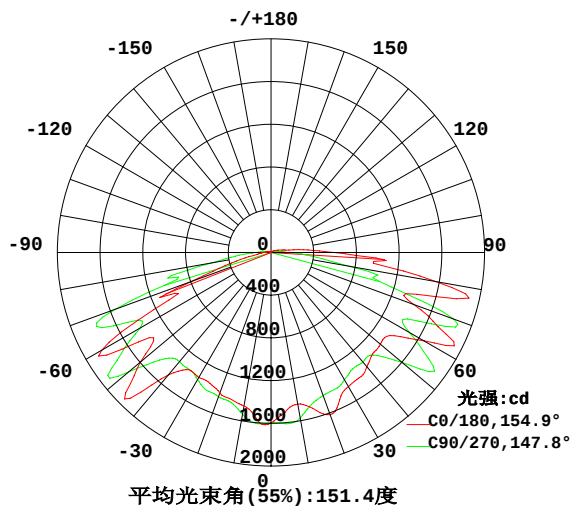

Cone Charts

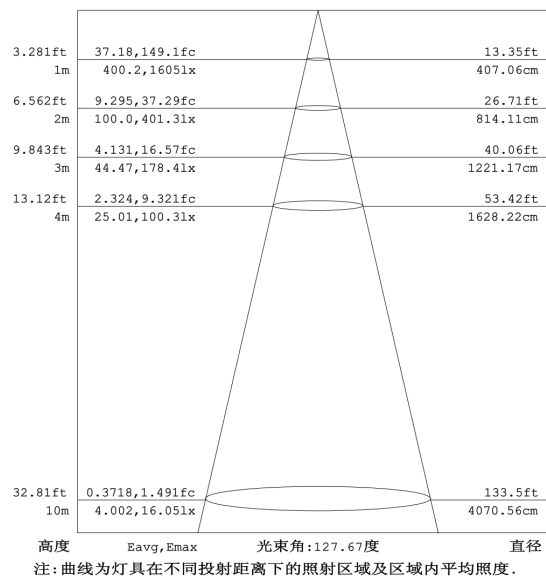

Specification

Specification		
Model	Square CPSM100	Round CPSL100
Colour Temperature (1CCT)	3500K/4000K/5000K Selectable	3500K/4000K/5000K Selectable
Lumen (lm)	13000 lm@100W	13000 lm@100W
Efficiency (lm/w)	130 lm/W	130 lm/W
Light Source	LED	LED
CRI (%)	≥80	≥80
Beam Angle	150°	150°
Power Requirement	120~277VAC	120~277VAC
Power	100/80/60W Selectable	100/80/60W Selectable
Dimmable	0-10V dimming	0-10V dimming
Housing	Die- cast aluminium	Die- cast aluminium
Operation Temperature	-40°C~+50°C	-40°C~+50°C
Product Dimension	255.6 x 255.6 x 69.3mm	φ290 x 86.8mm
PF	≥ 0.9	≥ 0.9
Warranty	5 Years	5 Years

Specifications are subject to change without notice