


150W ECO UFO High Bay



Product Features

- Aluminium die cast housing.
- No yellowing frosted glass lens.
- White or black housing.
- Ultra thin body.
- Supplied with 1.5m wire and plug.
- Excellent Cooling System.
- ETL Approved.
- Low Glare.
- Waterproof Housing.



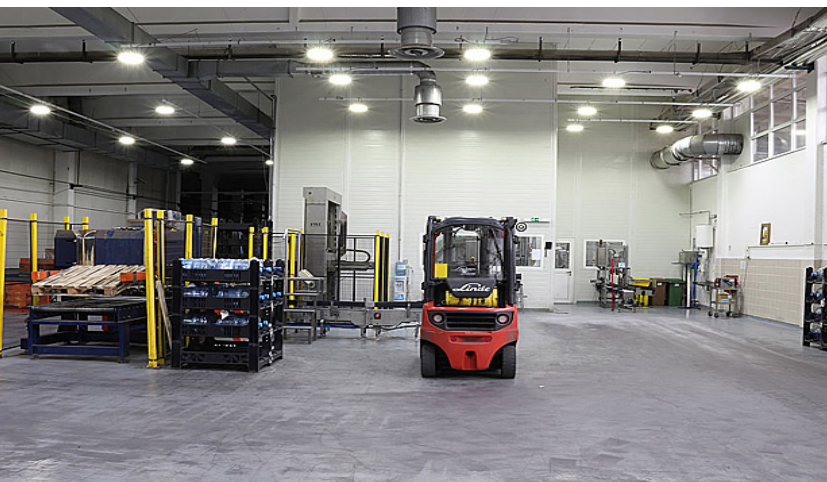


150W ECO UFO High Bay

Specification Overview

| Model | Power | Input Voltage | Colour Temp | Lumens | Beam Angle | Trim Colour | Dimensions |
|------------|-------|---------------|-------------|---------|------------|-------------|------------|
| KLHB150WCW | 150w | 110-120VAC | 5000K | 15800lm | 110° | Black/White | Ø300x42mm |

Product Specification

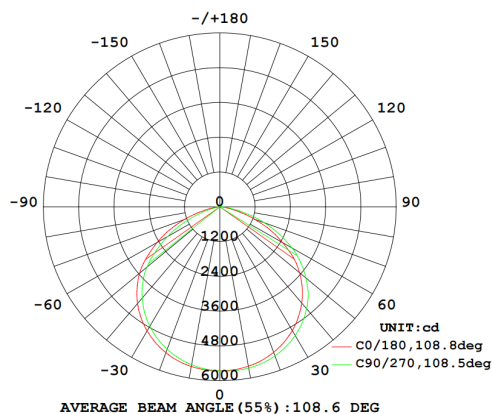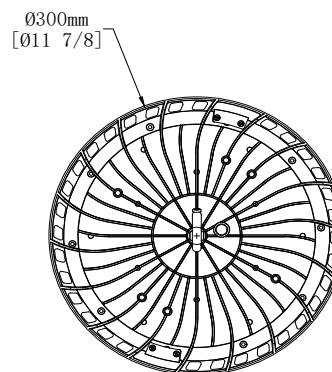

Flux out: 12415 lm

| | | |
|---------|----------------|-----------|
| 3.281ft | 154.8, 527.3fc | 9.965ft |
| 1m | 1667, 5676lx | 303.74cm |
| 6.562ft | 38.71, 131.8fc | 19.93ft |
| 2m | 416.7, 1419lx | 607.49cm |
| 9.843ft | 17.20, 58.59fc | 29.9ft |
| 3m | 185.2, 630.7lx | 911.23cm |
| 13.12ft | 9.677, 32.96fc | 39.86ft |
| 4m | 104.2, 354.8lx | 1214.97cm |
| 32.81ft | 1.548, 5.273fc | 99.65ft |
| 10m | 16.67, 56.76lx | 3037.43cm |

Height Eavg, Emax Angle: 113.27deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Specification

| | |
|---------------------------|---|
| Model | KLHB150WCW |
| Colour Temperature (1CCT) | 5000K |
| Lumen (lm) | 15800 lm |
| Efficiency (lm/w) | 100 lm/W |
| Light Source | LED |
| CRI (%) | ≥80 |
| Beam Angle | 110° |
| Power Requirement | 110~120VAC |
| Power Consumption | 150 W |
| Dimmable | No |
| Housing | Diecast aluminium with glass lens cover |
| Operation Temperature | -40°C~+45°C |
| Product Dimension | Ø300 x 42mm |
| PF | 0.9 |
| Warranty | 3 Years |

Specifications are subject to change without notice